



# Rockmills Steel Products ©

(516) 829-8555

Info@rockmillsboilers.com

Over 50 years of excellence  
(718) 366-8300

## Specifications



**Series**  
**Horse Power:**  
**Efficiency**

**MP-400SL**  
**400 H.P.**  
**Up to 85%**

---

### Gross Output

<b>Steam</b>	55800.0	<b>SQ.FT</b>
<b>Steam</b>	13390.0	<b>MBH</b>
<b>Steam</b> (per hr from & at 212 Deg F)	13800.0	<b>LBS</b>

---

### Net Rating

<b>SQ.Ft of Steam</b>	44640.0	<b>SQ.FT</b>
<b>MBH of Steam</b>	10712.0	<b>MBH</b>

---

### Firing Rate

<b>Light Oil</b> (140000 BTU/Gal)	116.6	<b>GPH</b>
<b>Heavy Oil</b> (150000 BTU GAL)	108.9	<b>GPH</b>
<b>GAS</b>	16329.3	<b>MBH</b>

---

### General Information

<b>Heating Surface</b>	2000	<b>SQ.FT</b>
<b>Furnace Volume</b>	236.035	<b>CU. FT</b>
<b>Safety Valve Relieving Capacity -</b> Required Steam (Min)	16000	<b>LB/HR</b>
<b>Steam Outlet Pipe Size</b>	10	<b>IN</b>
<b>Dry Boiler Weight (Approximate)</b>	36,308	<b>LB</b>
<b>Operating Weight (Approximate)</b>	58,424	<b>LB</b>



# Rockmills Steel Products ©

(516) 829-8555

Info@rockmillsboilers.com

Over 50 years of excellence  
(718) 366-8300

## Dimensions




### Series MP-4

Horse Power:  
Efficiency

### MP-400SL

400 H.P.  
Up to 85%

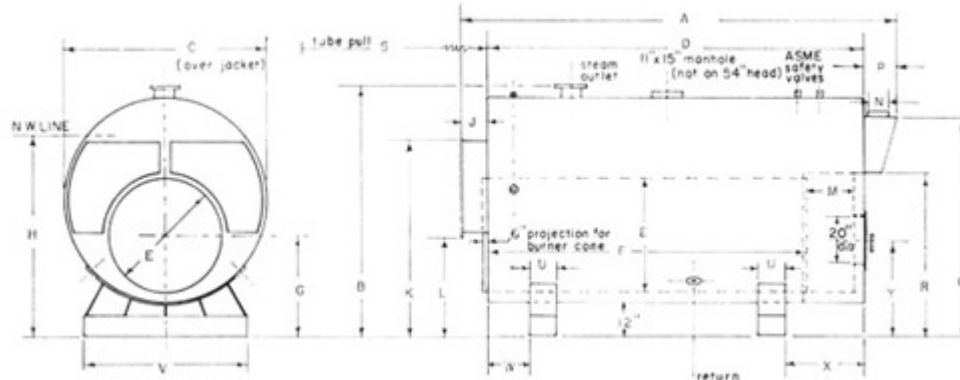

\*\* As per ASME code all boilers with a diameter greater than 60" will be equipped with 12"x16" manhole

## Dimensions

<b>A</b>	Overall Length	21-1 7/8	FT-IN.
<b>B</b>	Overall Height	110	IN.
<b>C</b>	Shell Diameter (Over jacket 2" thick)	94.125	IN.
<b>D</b>	Shell Length	17-8 5/8	FT-IN.
<b>E</b>	Furnace Diameter	48	IN.
<b>F</b>	Furnace Length	181.625	IN.
<b>G</b>	Height-Centerline of Furnace	40	IN.
<b>H</b>	Normal Water Line		IN.
<b>J</b>	Depth-Front Reversing Chamber	10.75	IN.
<b>K</b>	Height-Front Rev. Chamber Top	84.375	IN.
<b>L</b>	Height-Front Rev. Chamber Bottom	38.25	IN.
<b>M</b>	Depth-Rear Combustion Chamber	24	IN.
<b>N</b>	Vent Outlet Diameter	33	IN.
<b>P</b>	Depth-Smoke Box	29.75	IN.
<b>Q</b>	Height-Smoke hood Top	100.1875	IN.
<b>R</b>	Height-Smoke hood Bottom	69.8125	IN.
<b>S</b>	Tube Pull	17-8 5/8	FT-IN.
<b>U</b>	Saddle Width	8	IN.
<b>V</b>	Saddle Length	78	IN.
<b>W</b>	Position-Front Saddle	14	IN.
<b>X</b>	Position-Rear Saddle	26	IN.
<b>Y</b>	Centerline of Access Door	32.375	IN.
<b>Z</b>	Manhole	12 x 16	IN.
	Handhole	3 x 4	IN.